

SELF PROPELLED ACCESS PLATFORM



12.20m (40ft) Working height

6.10m (20ft)
Working outreach

Telescopic Upper Boom

Greater accuracy when positioning platform

1.50m Chassis Available Improved narrow aisle access

Weight Under 3.1 Tonnes
Low cost transportation

Fully Proportional Hydraulic Controls

Simple, reliable & easy to maintain

Bi-Energy AvailableOptimising Utilisation











Heightrider 12


The Nifty **Height Rider 12** is one of the most versatile and reliable machines in its class. It is specifically designed to give maximum reach performance from the lightest, most compact base possible. A telescopic upper boom gives improved accuracy when positioning the platform and superb manoeuvrability makes it ideal for a wide range of applications.


SAFETY FEATURES

- Automatic Failsafe Brakes
- Tilt Alarm
- Foam Filled or Solid Tyres
- Manual Descent with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hvdraulic Cylinders
- Dual Harness Points
- CE Mark




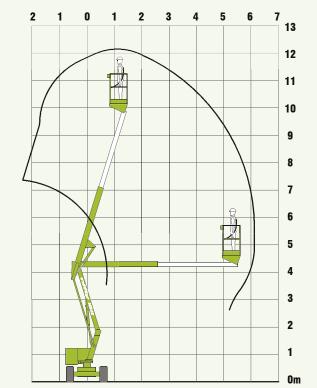









SPECIFICATIONS

40.00	400
12.20m	40ft
10.20m	33ft 5in
6.10m	20ft
360°	
1.80m	5ft 11in
1.50m	4ft 11in
1.90m	6ft 3in
4.10m	13ft 5in
2,630kg*	5,800lbs*
3,060kg*	6,750lbs*
2.22m	7ft 3in
4.20m	13ft 9in
200kg	440lbs
1.10m x 0.65m	3ft 7in x 2ft 2in
2.1mph	3.4 kph
25%	
Fully Proportional Hydraulic	
Battery Only	
Petrol, Diesel or LPG Only	
Bi-Energy (Engine & Battery)	
	6.10m 360° 1.80m 1.50m 1.90m 4.10m 2,630kg* 3,060kg* 2.22m 4.20m 200kg 1.10m x 0.65m 2.1mph 25% Fully Proportional Battery Only Petrol, Diesel or Li

^{*} Weights may vary according to specification, please confirm before ordering.



Telephone: 0117 967 0811
Email: info@davisaccess.co.uk
Web: www.davisaccess.co.uk